

ALL PRODUCT CATALOG



Utility, Pedestal, Gas Engine

Sump, Effluent, Dewatering

Sewage, Dewatering

Grinder Pumps and Systems

Hazardous Environment

Package Systems

Specialty Products

Accessories & Controls

FM0532
0712
Supersedes
1211

UTILITY, PEDESTAL, GAS ENGINE

Model	HP	Discharge	Volts	Ph	Operation	Listings or Cert.	Std. Cord Length	Width	Height	Weight	Gallons per minute (GPM) @ Height						Shut Off
											5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	
42	1/6	1"	115	1	NonAuto	✓	9 ft.	6"	9-1/2"	7.3	15	11	6	--	--	--	19
44/LM44	1/4	1"	115	1	NonAuto	✓	9 ft.	6"	11-3/4"	7.7/8.7	30	22	12	--	--	--	20
46	1/2	2"	115	1	NonAuto	✓	9 ft.	8"	14-1/2"	16	55	47	37	25	5	--	33
311		hose	115	1	NonAuto	✓	6 ft.			7.75	Maximum flow @ 1 ft. Head = 5.6 GPM						39
314	1/2	hose	115	1	NonAuto	✓	9 ft.			17	21	20	19	--	--	--	23
81	.3	1-1/4"	115	1	Auto	✓	7-1/2 ft.	9.55	31-1/4"	15	50	36	10	--	--	--	16
82	1/3	1-1/2"	115	1	Auto	✓	7-1/2 ft.	9.55	31-3/4"	19	52	41	12	--	--	--	17
84	1/2	1-1/2"	115	1	Auto	✓	7-1/2 ft.	9.55	32-1/2"	22.5	59	51	38	17	--	--	24



40 Series



311



314



80 Series

SUMP, EFFLUENT, DEWATERING

Model	HP	Discharge	Volts	Ph	Operation	Double Seal Option	Listings or Cert.	Auto Std. Cord Length	Width	Height*	Gallons per minute (GPM) @ Height												Shut Off
											5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	35 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	
49	1/4	1-1/2"	115	1	Auto		✓	9 ft.	8-3/32"	10-1/2"	32	25	10	--	--	--	--	--	--	--	--	--	18
53, 55, 57, 59	.3	1-1/2"	115, 230	1	Auto/NonAuto		✓	9 ft.	10-3/32"	10-1/6"	43	34	19	--	--	--	--	--	--	--	--	--	19.25
72	.3	1-1/2"	115	1	Auto/NonAuto		✓	9 ft.	9-1/16"	11-13/16"	38	30	14	--	--	--	--	--	--	--	--	--	18
76	1/2	1-1/2"	115	1	Auto/NonAuto		✓	9 ft.	9-1/16"	12-5/8"	50	40	30	17	--	--	--	--	--	--	--	--	25
98	1/2	1-1/2"	115, 230	1	Auto/NonAuto		✓	15 ft.	10-1/8"	12"	72	61	45	25	--	--	--	--	--	--	--	--	23
137, 139	1/2	1-1/2"	115, 230, 200-208, 460	1, 3	Auto/NonAuto		✓	10 ft.	12-1/4"	12-3/4"	93	79	64	36	8	--	--	--	--	--	--	--	26
140	1	1-1/2"	115, 230	1	NonAuto	✓	✓	20 ft.	10-3/16"	12-13/32"	86	80	73	66	59	49	38	28	--	--	--	--	50
145	3/4	1-1/2"	115	1	NonAuto	✓	✓	20 ft.	10-3/16"	12-13/32"	61	60	56	53	49	45	40	35	26	16	--	--	74
											5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	
151	1/3	1-1/2"	115, 230	1	Auto/NonAuto		✓	20 ft.	11"	16 1/2"	50	45	38	29	16	--	--	--	--	--	--	--	30
152	.4	1-1/2"	115, 230	1	Auto/NonAuto		✓	20 ft.	11"	16 1/2"	69	61	53	44	34	23	--	--	--	--	--	--	38
153	1/2	1-1/2"	115, 230	1	Auto/NonAuto		✓	20 ft.	11"	16 1/2"	77	70	61	52	42	33	22	11	--	--	--	--	44
161	1/2	1-1/2" or 2" or 3"	115, 230, 200-208, 460	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	100	93	85	79	70	62	45	20	--	--	--	--	56
163	1/2	1-1/2" or 2" or 3"	115, 230, 200-208, 460	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	61	61	60	59	57	55	46	33	15	--	--	--	66
165	1	1-1/2" or 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	61	61	61	60	59	58	55	50	39	23	10	--	86.5
											5 ft.	10 ft.	20 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	100 ft.	110 ft.	
185	1	1-1/2" or 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	--	--	--	85	70	51	32	9	--	--	--	--	73
186	1.5	1-1/2" or 2" or 3"	230, 460	1, 3	Auto/NonAuto	✓		20 ft.	12-3/4"	18-9/16"	58	58	58	58	58	58	58	52	45	30.5	16	4	114
188	1.5	1-1/2" or 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	145	140	128	116	103.5	90	71	51	28	2	--	--	91
189	2	1-1/2" or 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	145	140	130.5	120	109	97	85	69	51	34	17	--	110
											5 ft.	10 ft.	20 ft.	30 ft.	40 ft.	60 ft.	80 ft.	90 ft.	100 ft.	110 ft.	120 ft.	130 ft.	
191	2	1-1/2" or 2" or 3"	230	1	NonAuto			20 ft.	12-3/4"	18-9/16"	45	45	45	45	45	45	45	45	40	30	20	10	137

* Single Seal Units



49



50 Series



70 Series



98



130 Series



140/145



160 Series



180 Series

NOTES:

- BN/BE Models available packaged with a piggyback variable level float switch.
- UL certification is Standard UL778. CSA is certified to CSA Standard C22.2 No. 108.

- No UL listing for 200-208V / 1 Ph pumps.
- A double shaft seal available on 140, 160 & 180 series.

Quality

© Copyright 2012 Zoeller Co. All rights reserved.

SEWAGE and DEWATERING

Model	HP	Discharge	Volts	Ph	Operation	Double Seal Option	Listings or Cert.	Std. Cord Length	Width	Height*	Gallons per minute (GPM) @ Height												Shut Off
											5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	
211	.4	2"	115	1	Auto/NonAuto		✓	15 ft.	9-5/16"	15-7/8"	82	53	32	--	--	--	--	--	--	--	--	--	19.5
264	.4	2"	115, 230	1	Auto/NonAuto		✓	15 ft.	13-9/64"	14-3/4"	90	60	23	--	--	--	--	--	--	--	--	--	18
266, 267, 268	1/2	2"	115, 230, 200-208, 460	1, 3	Auto/NonAuto		✓	10 ft./15 ft.	13-5/32"	14-9/32"	128	89	50	10	--	--	--	--	--	--	--	--	21.5
270	1	2"	115, 230	1	NonAuto	✓		20 ft.	13-1/16"	15"	132	101	77	56	29	--	--	--	--	--	--	--	29
282	1/2	2" or 3"	115, 230, 200, 460	1, 3	Auto/NonAuto	✓	✓	10 ft./15 ft.	13-9/16"	18-13/16"	127	96	64	34	6	--	--	--	--	--	--	--	26
284	1	2" or 3"	230, 200, 460	1, 3	NonAuto	✓	✓	10 ft./15 ft.	13-9/16"	18-13/16"	179	157	133	106	73	42	--	--	--	--	--	--	35
292	1/2	2" or 3"	115, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-7/8"	18-9/16"	140	124	108	91	75	56	10	--	--	--	--	--	42
293	1	2" or 3"	230, 200, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-7/8"	18-9/16"	--	--	118	108	96	82	48	--	--	--	--	--	50
294	1-1/2	2" or 3"	230, 200, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-7/8"	18-9/16"	196	181	165	150	136	121	94	58	13	--	--	--	62
295	2	2" or 3"	230, 200, 460, 575	1, 3	Auto/NonAuto	✓	✓	20 ft.	12-7/8"	18-9/16"	214	199	184	168	154	140	115	89	59	23	--	--	75
											5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	35 ft.	40 ft.	45 ft.	50 ft.	55 ft.	60 ft.	
404	2	4"	230, 200-208, 460, 575	1, 3	NonAuto	✓	✓	20 ft.	16-1/8"	26"	300	265	224	184	134	60	--	--	--	--	--	--	33
405	3	4"	230, 200, 460, 575	1, 3	NonAuto	✓	✓	20 ft.	12-3/4"	18-9/16"	361	326	284	241	197	134	50	--	--	--	--	--	38
611	1	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	Standard	✓	25 ft.	17-9/16"	29-1/4"	255	190	110	35	--	--	--	--	--	--	--	--	22
621	1.5	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	Standard	✓	25 ft.	17-9/16"	29-1/4"	340	277	215	143	72	--	--	--	--	--	--	--	29
631	2	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	Standard	✓	25 ft.	17-9/16"	29-1/4"	385	330	275	220	150	80	--	--	--	--	--	--	35
641	3	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	Standard	✓	25 ft.	17-9/16"	29-1/4"	480	430	380	325	270	208	143	72	--	--	--	--	44
651	5	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	Standard	✓	25 ft.	17-9/16"	29-1/4"	575	533	490	440	390	335	280	220	150	80	--	--	55
661	7.5	3" or 4"	230, 200, 460, 575	3	NonAuto	Standard	✓	25 ft.	17-9/16"	29-1/4"	--	600	560	515	475	430	383	330	280	220	150	85	65

* Single Seal Units



GRINDER PUMPS

Model	HP	Discharge	Volts	Ph	Operation	Listings or Cert.	Std. Cord Length	Width	Height*	Gallons per minute (GPM) @ Height														
										10 ft.	30 ft.	50 ft.	70 ft.	90 ft.	110 ft.	130 ft.	150 ft.	170 ft.	190 ft.	210 ft.	220 ft.	240 ft.	250 ft.	
810	1	1-1/4"	230	1	Non Auto	✓	20 ft.	15-1/4"	22-3/8"	15.3	14.2	13.2	12.3	11.5	10.5	9.6	8.7	--	--	--	--	--	--	
815	2	1-1/4"	230	1	NonAuto	✓	20 ft.	15-1/4"	22-3/8"	15.3	14.2	13.2	12.3	11.5	10.5	9.6	8.7	7.8	6.8	5.7	5.0	4.0	--	
										5 ft.	10 ft.	20 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	100 ft.	110 ft.	120 ft.	130 ft.	
820	2	1-1/4"	230	1	Auto, NonAuto	✓	20 ft.	11-5/8"	18-5/8"	46	46	46	46	46	46	43	36	27	16.7	7	--	--	107	
840	2	1-1/4"	230, 200, 460, 575	1, 3	NonAuto	✓	20 ft.	11-21/32"	24-7/32"	45	45	45	44	42	36	30	23	16	10	3	--	--	104	
841	3	1-1/4"	230, 200, 460, 575	1, 3	NonAuto	✓	20 ft.	13-3/16"	22"	61	61	61	61	61	61	60	55	47	38	28	18	7	125	
842	2	1-1/4"	230, 200, 460, 575	1, 3	NonAuto	✓	20 ft.	11-11/16"	23-3/4"	34	34	34	34	34	34	34	32	29	25	20	13	4	125	
915	.5	1-1/4"	115	1	Auto	✓	15 ft.	18"x30" Basin	27	--	--	--	--	--	--	--	--	--	--	--	--	--	26	

* Single Seal Units

NOTES:

- BN/BE Models available packaged with a piggyback variable level float switch.
- UL certification is Standard UL778. CSA is certified to CSA Standard C22.2 No. 108.
- No UL listing for 200-208V / 1 Ph pumps.
- A double shaft seal available on 280, 290, 400 & 600 series.



Service

HAZARDOUS ENVIRONMENT

Model	HP	Discharge	Volts	Ph	Operation	Non Auto Listings or Cert.	Std. Cord Length	Width	Non Auto Height*	Gallons per minute (GPM) @ Height														Shut Off ft.
										5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	100 ft.	110 ft.	
X161	1/2	1-1/2" 2" or 3"	115, 230, 200-208, 460	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	100	93	85	79	70	62	45	20	--	--	--	--	--	--	56
X163	1/2	1-1/2" 2" or 3"	115, 230, 200-208, 460	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	61	61	60	59	57	55	46	33	15	--	--	--	--	--	66
X165	1	1-1/2" 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	61	61	61	60	59	58	55	50	39	23	10	--	--	--	86.5
										5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	100 ft.	110 ft.	
X185	1	1-1/2" 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-3/16"	22"	--	--	--	85	70	51	32	9	--	--	--	--	--	--	73
X186	1-1/2	1-1/2" 2" or 3"	230, 460	1, 3	Auto/NonAuto	✓	20 ft.	13-3/16"	22"	58	58	58	58	58	58	58	52	45	30.5	16	4	--	--	114
X188	1-1/2	1-1/2" 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-3/16"	22"	145	140	128	116	103.5	90	71	51	28	2	--	--	--	--	91
X189	2	1-1/2" 2" or 3"	230, 200-208, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-3/16"	22"	145	140	130.5	120	109	97	85	69	51	34	17	--	--	--	110
										10 ft.	20 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.	100 ft.	110 ft.	120 ft.	130 ft.			
X191	2	1-1/2" 2" or 3"	230	1	Auto/NonAuto	✓	20 ft.	13-3/16"	22"	45	45	45	45	45	45	45	45	40	30	20	10	--	--	137
										5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	35 ft.	45 ft.	50 ft.	55 ft.	60 ft.	65 ft.			
X282	1/2	2" or 3"	115, 230, 200, 460	1, 3	Auto/NonAuto	✓	20 ft.	13-9/16"	22-1/4"	127	96	64	34	6	--	--	--	--	--	--	--	--	--	26
X284	1	2" or 3"	230, 200, 460	1, 3	Auto/NonAuto	✓	20 ft.	13-9/16"	22-1/4"	179	157	133	106	73	42	--	--	--	--	--	--	--	--	35
										5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.	90 ft.			
X292	1/2	2" or 3"	115, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	140	124	108	91	75	56	10	--	--	--	--	--	--	--	42
X293	1	2" or 3"	230, 200, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	--	--	118	108	96	82	48	--	--	--	--	--	--	--	50
X294	1-1/2	2" or 3"	230, 200, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	196	181	165	150	136	121	94	58	13	--	--	--	--	--	62
X295	2	2" or 3"	230, 200, 460, 575	1, 3	Auto/NonAuto	✓	20 ft.	13-5/16"	22"	214	199	184	168	154	140	115	89	59	23	--	--	--	--	75
										5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	35 ft.	40 ft.	50 ft.	60 ft.	70 ft.	80 ft.			
X404	2	4"	230, 200, 460, 575	1, 3	NonAuto	✓	20 ft.	16-1/8"	25-15/16"	300	265	224	184	134	60	--	--	--	--	--	--	--	--	33
X405	3	4"	230, 200, 460, 575	1, 3	NonAuto	✓	20 ft.	16-1/8"	25-15/16"	361	326	284	241	197	134	50	--	--	--	--	--	--	--	38
										5 ft.	10 ft.	15 ft.	20 ft.	25 ft.	30 ft.	35 ft.	40 ft.	45 ft.	50 ft.	55 ft.	60 ft.			
X611	1	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	✓	25 ft.	17-9/16"	33-1/4"	255	190	110	35	--	--	--	--	--	--	--	--	--	--	22
X621	1.5	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	✓	25 ft.	17-9/16"	33-1/4"	340	277	215	143	72	--	--	--	--	--	--	--	--	--	29
X631	2	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	✓	25 ft.	17-9/16"	33-1/4"	385	330	275	220	150	80	--	--	--	--	--	--	--	--	35
X641	3	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	✓	25 ft.	17-9/16"	33-1/4"	480	430	380	325	270	208	143	72	--	--	--	--	--	--	44
X651	5	3" or 4"	230, 200, 460, 575	1, 3	NonAuto	✓	25 ft.	17-9/16"	33-1/4"	575	533	490	440	390	335	280	220	150	80	--	--	--	--	55
X661	7.5	3" or 4"	230, 200, 460, 575	3	NonAuto	✓	25 ft.	17-9/16"	33-1/4"	--	600	560	515	475	430	383	330	280	220	150	85	--	--	65



PACKAGE SYSTEMS

Model	Pumps Available	Volts	Basins Sizes Available	Check Valve Included	Assembled or Preassembled
Simplex Systems					
910	264, 267, 268	115, 230	18" x 30"	2" Cast Iron or PVC	Unassembled
912	211, 264, 266	115, 230	18" x 30", 24" x 24" 24" x 30", 24" x 30"	Not Included	Preassembled
Duplex Systems					
910	264, 267	115, 230	30" x 36"	2" Tri-Check®	Unassembled
Preassembled Sewage System					
912	211, 264, 266	115, 230	24" x 24"	Not Included	Preassembled
Preassembled Grinder System					
922	820, 840	230/1 Ph - 460/3 Ph	24" x 36", 36" x 96"	Included	Preassembled
932	810	230/1 Ph	24" x 36", 36" x 96"	Included	Preassembled



Innovation

SPECIALTY PRODUCTS

Qwik Jon® Ultima Models 202, 203, 204

Enables you to install a bathroom almost anywhere. Preamsembled pump and tank for simple installation. Use Model 202 (system includes ADA compliant toilet, tank, and grinder pump) or supply your own toilet with Model 203. Model 204 (shower only) unit. (FM2368)

Drain Pump Series Models 104, 105, 110, 115, 120, 131

Excellent for bar sinks, laundry trays, dishwasher or condensate removal. No need to dig a sump, no filters or screens to un-clog. Compact design easily fits under sinks. (FM2335)

Crawl Space Pumping System Models 108, 138

Helps eliminate structural damage caused by standing water. Helps prevent odor, mold and fungus. An excellent add-on service for pest controllers, contractors and remodelers. (FM1647)

Aeration/Fountain Pump Model 370

Helps eliminate stagnant water and algae build up. Aerates up to 4,900 gallons per hour. Includes 100' power cord and multiple spray patterns. (FM2332)

Condensate Pump Model 521

Automatic removal of condensate from A/C units, ice makers, water coolers, etc... All models include holding tank. Includes built-in safety shut down switch. (FM1606)

Agricultural 4290, 4291 Double Seal Series

Specifically designed for lagoon or sump pit applications. Extra long cord lengths, seal upgrades, and large pumping clearances make this ideal for harsh environments.

Oil Smart® System Model 940


Designed to protect the environment by preventing oils and other hydrocarbons from being pumped out of elevator pits, transformer vaults or other areas prone to contamination. Includes advanced solid state alarm system. Available in multiple, simplex or duplex configurations. (FM2193)

High Temp Pumps 2000 and 3000 Series

Rated for 200° F intermittent (2000 series) or continuous (3000 series) duty in sump or sewage applications. High temperature rated components meet NEC requirements. Ideal for steam tunnels applications, boiler blow down applications etc. . . (FM1922)

109 SRS (Scale Removal System)

Removes line scale build-up in tankless water heating units.

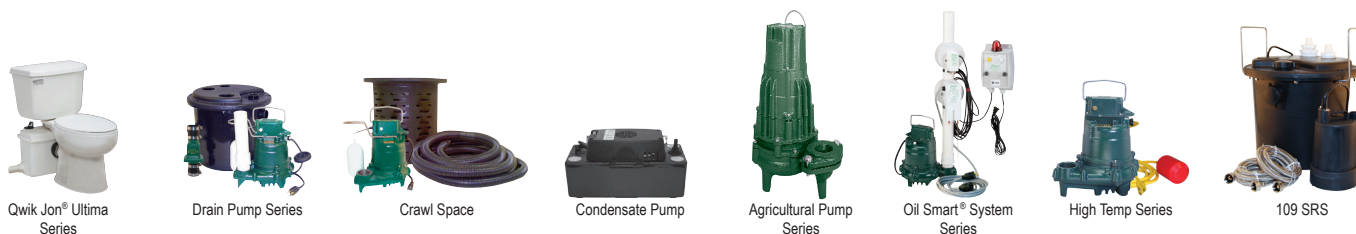

BACKUP SYSTEMS

Home Guard® MAX Model 503

No electricity required. Pumps water with water. The Max uses municipal pressure to remove incoming ground water. Works with all major brand sump pumps. (FM1283) (Primary pump not included)

Basement Sentry® Series Models 507, 510

Reliable 12 volt DC systems take over during power outages or primary pump failure. Includes pump, charger, audible/visual alarm and all installation hardware. (FM0861)

Aquanot® Series Models 580, 585

Zoeller highest capacity back-up system. Powerful 12 volt pedestal pump and 25 amp charger provide hours of protection. Narrow foot print allows for installation in smaller sumps. (FM1612)



DID YOU KNOW . . . Every pump manufactured by Zoeller Pump leaves our Factory 100% fully tested, packed with innovative features, meeting our highest quality standards and backed by our commitment to Customer Service!

ACCESSORIES and CONTROLS

Smart Pak Plus

Zoeller's Smart Pak Plus is a residential alternator system. This system allows you to install two automatic pumps up to .5 HP, 115V, 12 amps, single phase and alternate their use and will provide for extended pump life. The special design allows for use in humid areas like basements and the true alternation allows each pump to be used equally, not timed. The built-in alarm automatically sounds if one of the pumps should fail and calls for the second pump to run during a pump failure. See FM1663.

Control Panels

Electrical control panels are used in simplex and duplex applications where features and benefits beyond the capability of a preset integral or piggy-back float switch are required. All weather enclosures, built-in alarm systems with remote capability, and manual run override are basic features on most units. Duplex panels offer the benefit of alternating the work load equally between two pumps. The "lead" pump operates under normal flow conditions, with the "lag" pump becoming operational in the event of high level water conditions. Panels with intrinsically safe circuits are available for use with explosion proof rated pumps in hazardous areas. See FM1596, FM 0486, & FM1705.

Float Switches

Zoeller has a full line offering of pump and control switches for pump up and down applications. Constructed of PVC/Poly and available in various lengths. Both mechanical and mercury models are available. UL listed. See FM0526 & FM0477.

"Full-Flow" Unichheck

The Zoeller "Full-Flow" Unichheck features flexible neoprene slip x slip unions with all stainless steel clamps and screws. Saves installation time and is simple to install. No pipe threading required. Checks back flow of water and sewer gas and features an extra wide flapper hinge to prevent hinge stress. Can be installed in a vertical or horizontal line. Available in cast iron or PVC construction. See FM0217.

Tri-Check® and The "Combo"

The Zoeller full flow Tri-Check® and "Combo" feature a threaded union that allows the pump to be removed without disrupting discharge piping. This saves time and money and is easy to install. The neoprene gasket and flapper are weighted with stainless steel backing plates and stainless steel rivets and can be installed on either a vertical or horizontal pipe. See FM0217.

Aquanot® Flood Alert

The ultimate low water sensing alarm. Stainless steel sensors alert in as little as 1/32" of water. Operates on 3 AAA batteries and has low battery alert. See FM1617.

A-Pak Alarm Systems

From indoor residential systems to NEMA 4X commercial/industrial applications, Zoeller has the right alarm for the job. See FM0732.

Qwik-Box Pump Control and Alarm System

The Qwik-Box is a junction connection box designed for easy hookup of pumps and alarm systems used in septic effluent, sewage, or dewatering applications requiring a connection outside the building or residence. The Qwik-Box eliminates the need for junction wiring boxes inside sewage and septic tanks, and consists of UL Listed components. The sealed receptacle also eliminates the need for a separate outdoor disconnect. The pump and piggyback float switch plug directly into the sealed receptacle. The Qwik-Box allows you to open the cover and have the pump unit serviced by disconnecting piggyback pump float switch cord at the receptacle. See FM1420.

Prewired Conduit and J-Box Assemblies

Zoeller Pre-Wired Conduit assemblies simplify the electrical portion of any pump job. Instead of an electrical job taking a half a day to get power to the lift station, it now takes only minutes. Zoeller has engineered flexible, watertight conduit and junction box assemblies to assist in getting the job done quickly and efficiently. See FM2080 and FM1597.

Disconnect and Rail Systems

Complete systems for sewage effluent and grinder pumps, can be field installed or factory installed in concrete, steel or fiberglass basins and tanks. Guide rails direct the pump to and from the base elbow. See FM0787.



Smart Pak Plus



Control Panels



Float Switches



Unichhecks



Full Flow
Check Valves



Aquanot®
Flood Alert



Alarm Systems



Qwik-Box



Rail Systems



PUMP COMPANY

Zoeller Family of Water Solutions™

WAREHOUSE LOCATIONS

Southern California, 13450 Imperial Hwy. • Santa Fe Springs, CA 90670
(562) 921-6770 • FAX (562) 921-8150
Northern California, 1170 O'Brien Dr. • Menlo Park, CA 94025
(650) 833-5830 • FAX (650) 833-5835
Canada, 1120 Michele-Bohec • Blainville, QC J7C 5N5
(450) 434-3384 • FAX (450) 434-0733
Long Island, New York, 368 Wyandanch Ave. • NY 11703
(631) 253-0600 • FAX (631) 253-0303
Central Texas, 3649 Conflans #146 • Irving, TX 75061
(972) 313-1688 • FAX (281) 351-1125
Great Northwest, 6915 South 194th St. • Kent, WA 98032
(503) 238-0313 • FAX (253) 867-5040

3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-7867 • FAX (502) 774-3624
www.zoeller.com

Manufacturers of Quality Pumps Since 1939
Your Peace of Mind is Our Top Priority®

© Copyright 2012 Zoeller Co. All rights reserved.